

User's Manual







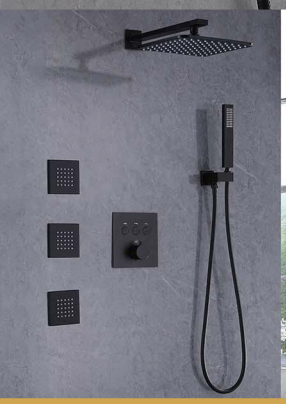

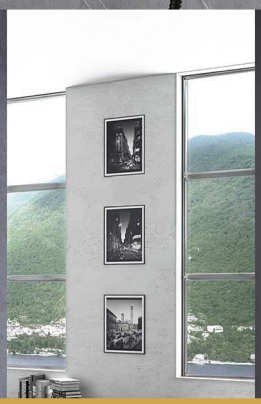








Please Do Not Return the Product to the Store.
Contact us with any questions.

After-sales email address: info@mod-land.com

Installation Manual

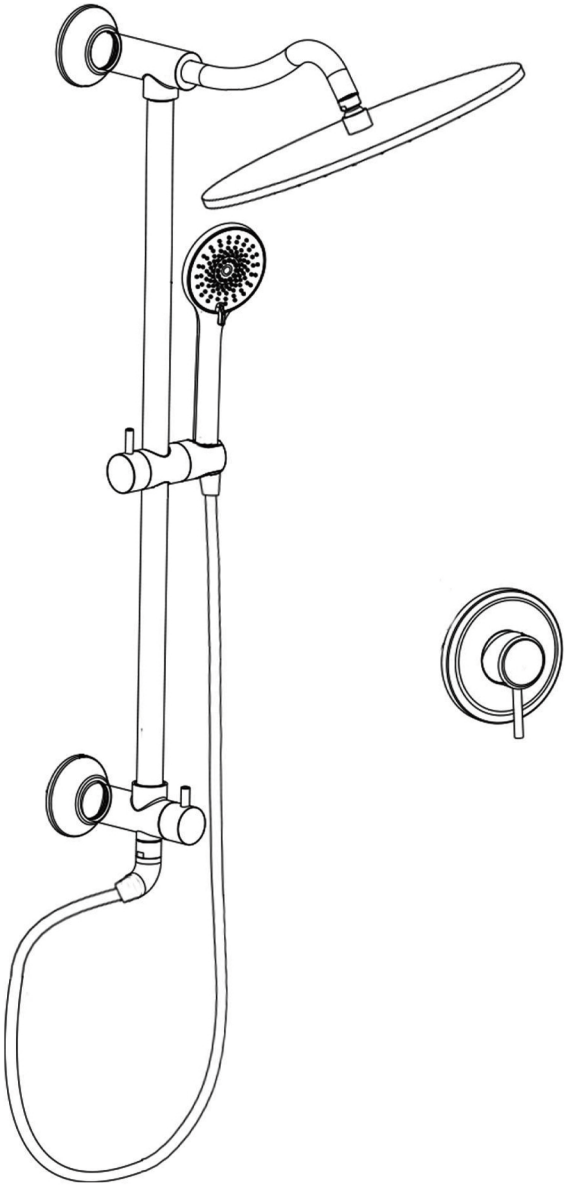



IAPMO RESEARCH AND TESTING, INC.

5001 East Philadelphia Street, Ontario, California 91761-2816 – USA • 909-472-4100 • 909-472-4244 • www.iapmort.org

CERTIFICATE OF LISTING

IAPMO Research and Testing, Inc. is a product certification body which tests and inspects samples taken from the supplier's stock or from the market or a combination of both to verify compliance to the requirements of applicable codes and standards. This activity is coupled with periodic surveillance of the supplier's factory and warehouses as well as the assessment of the supplier's Quality Assurance System. This listing is subject to the conditions set forth in the characteristics below and is not to be construed as any recommendation, assurance or guarantee by IAPMO Research and Testing, Inc. of the product acceptance by Authorities Having Jurisdiction.

This certificate is not evidence of current listing. To verify listing status, visit the IAPMO R&T Product Listing Directory at pld.iapmo.org

Effective Date: December 2019 -Rev. 2/24/2020- Void After: December 2024

Product: Flexible Water Connectors File No. 5311

Issued To: Fanski Group Inc.
Mechanical & Electrical
Industrial Zone,
Yuhuan County,
Yuhuan 317600, ZHEJIANG
China

Identification: Products shall be marked with manufacturer's name or trademark, a statement "For use with water in accessible locations only." The products shall also bear the cUPC® certification mark. Markings shall be by means of either a permanent mark on the product, a label on the product or a tag attached to the product.

Characteristics: Flexible water connectors manufactured in various sizes, lengths and metal end fittings for hot or cold water applications that consist of an inner tube, which may or may not have an outer braided cover. Connectors are to be installed for use in accessible locations only. To be installed in accordance with the manufacturer's instruction, and the latest edition of the Uniform Plumbing Code and National Plumbing Code of Canada.

Products listed on this certificate have been tested by an IAPMO R&T recognized laboratory. This recognition has been granted based upon the

Chairman, Product Certification Committee CEO, The IAPMO Group

This listing period is based upon the last date of the month indicated on the Effective Date and Void After Date shown above. Any change in material, manufacturing process, marking or design without having first obtained the approval of the Product Certification Committee, or any evidence of non-compliance with applicable codes and standards or of inferior workmanship, may be deemed sufficient cause for revocation of this listing. Production of or reference to this form for advertising purposes may be made only by specific written permission of IAPMO Research and Testing, Inc. Any alteration of this certificate could be grounds for revocation of the listing. This document shall be reproduced in its entirety.



IAPMO RESEARCH AND TESTING, INC.

5001 East Philadelphia Street, Ontario, California 91761-2816 – USA • 909-472-4100 • 909-472-4244 • www.iapmort.org

CERTIFICATE OF LISTING

IAPMO Research and Testing, Inc. is a product certification body which tests and inspects samples taken from the supplier's stock or from the market or a combination of both to verify compliance to the requirements of applicable codes and standards. This activity is coupled with periodic surveillance of the supplier's factory and warehouses as well as the assessment of the supplier's Quality Assurance System. This listing is subject to the conditions set forth in the characteristics below and is not to be construed as any recommendation, assurance or guarantee by IAPMO Research and Testing, Inc. of the product acceptance by Authorities Having Jurisdiction.

This certificate is not evidence of current listing. To verify listing status, visit the IAPMO R&T Product Listing Directory at pld.iapmo.org

Effective Date: November 2019 Void After: November 2024

Product: Plumbing Fixture Fittings File No. 10633

Issued To: Aqua Gallery Co.,ltd
13th-15th A10 Block
International Ceramics&
Sanitary City, 528000
Foshan,
China


Identification: Plumbing supply fittings complying with this Standard shall be marked with the manufacturer's recognized name, trademark, or other mark or, in the case of private labeling, the name, trademark or other mark of the customer for whom the fitting was manufactured. The marking shall be accomplished by use of a permanent mark or by placing a permanent label on the product. Markings on plumbing supply fittings shall be visible after installation.

Single-handle, single-control, and automatic compensating mixing bath and shower valves shall have identifiable temperature control settings in which the settings are indicated by words ("cold", "warm", "hot", etc.), by numbers, or graphically.

Packages shall be marked with the manufacturer's name, trademark, or other mark as well as the model number or, in the case of private

Chairman, Product Certification Committee CEO, The IAPMO Group

This listing period is based upon the last date of the month indicated on the Effective Date and Void After Date shown above. Any change in material, manufacturing process, marking or design without having first obtained the approval of the Product Certification Committee, or any evidence of non-compliance with applicable codes and standards or of inferior workmanship, may be deemed sufficient cause for revocation of this listing. Production of or reference to this form for advertising purposes may be made only by specific written permission of IAPMO Research and Testing, Inc. Any alteration of this certificate could be grounds for revocation of the listing. This document shall be reproduced in its entirety.

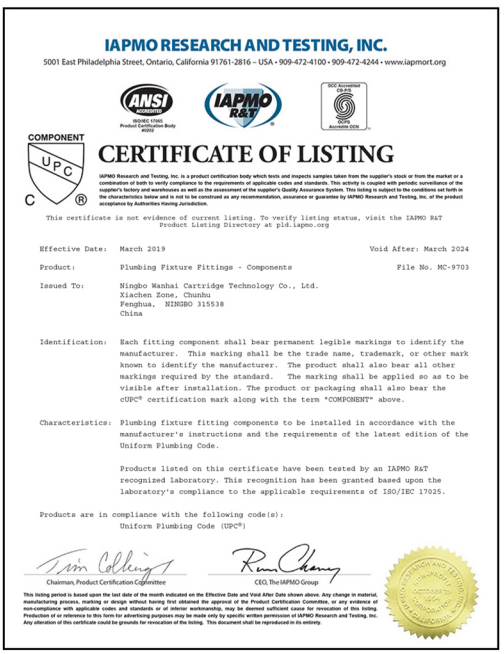

IAPMO RESEARCH AND TESTING, INC.

5001 East Philadelphia Street, Ontario, California 91761-2816 – USA • 909-472-4100 • 909-472-4244 • www.iapmort.org

CERTIFICATE OF LISTING

IAPMO Research and Testing, Inc. is a product certification body which tests and inspects samples taken from the supplier's stock or from the market or a combination of both to verify compliance to the requirements of applicable codes and standards. This activity is coupled with periodic surveillance of the supplier's factory and warehouses as well as the assessment of the supplier's Quality Assurance System. This listing is subject to the conditions set forth in the characteristics below and is not to be construed as any recommendation, assurance or guarantee by IAPMO Research and Testing, Inc. of the product acceptance by Authorities Having Jurisdiction.

This certificate is not evidence of current listing. To verify listing status, visit the IAPMO R&T Product Listing Directory at pld.iapmo.org

Effective Date: March 2019 Void After: March 2024

Product: Plumbing Fixture Fittings - Components File No. MC-9703

Issued To: Ningbo Wanhai Cartridge Technology Co., Ltd.
Xiachen Zone, Chunhu
Fenghua, NINGBO 315538
China

Identification: Each fitting component shall bear permanent legible markings to identify the manufacturer. This marking shall be the trade name, trademark, or other mark known to identify the manufacturer. The product shall also bear all other markings required by the standard. The marking shall be applied so as to be visible after installation. The product or packaging shall also bear the cUPC® certification mark along with the term "COMPONENT" above.

Characteristics: Plumbing fixture fitting components to be installed in accordance with the manufacturer's instructions and the requirements of the latest edition of the Uniform Plumbing Code.

Products listed on this certificate have been tested by an IAPMO R&T recognized laboratory. This recognition has been granted based upon the laboratory's compliance to the applicable requirements of ISO/IEC 17025.

Products are in compliance with the following code(s):
Uniform Plumbing Code (UPC®)


Chairman, Product Certification Committee CEO, The IAPMO Group

This listing period is based upon the last date of the month indicated on the Effective Date and Void After Date shown above. Any change in material, manufacturing process, marking or design without having first obtained the approval of the Product Certification Committee, or any evidence of non-compliance with applicable codes and standards or of inferior workmanship, may be deemed sufficient cause for revocation of this listing. Production of or reference to this form for advertising purposes may be made only by specific written permission of IAPMO Research and Testing, Inc. Any alteration of this certificate could be grounds for revocation of the listing. This document shall be reproduced in its entirety.

This product has been inspected and debugged by the factory to the best condition. Please do not disassemble and assemble it yourself.







Before installing the product, please be sure to remove sundries and sludge from the water pipe to prevent sundries from blocking the product.



Ⅰ.Installation Environment

1. Before installation, confirm whether the inlet pipe and angle valve are correct. Make sure that the installation is completed, and the water has been flushed to ensure that there is no impurities in the water inlet pipe;
2. Water inlet pressure requirements: 5bar⩾ inlet pressure ⩾0.5bar, it is recommended to install a pressure reducing valve if it is greater than 0.05MPa;
3. When installing and using the faucet, please use normal torque to prevent the handle from breaking.
4. If the customer goes out for a long time or does not use the faucet for a long time, please close the faucet valve and turn on the faucet switch to release the pressure and water in the faucet.


Ⅱ.Installation Aids

Hammet 	Spirit level 	Adjustable wrench 
Glue(do not use glue containing acetic acid) 	Impact drill 	Screwdriver 

Ⅲ.Parts List

After you unpack the product, please count the accessories with the packing list. If there is a shortage, please contact the dealer immediately. The following figure and table below are for reference only.(Note: The appearance of the product may be different)


PARTS LIST

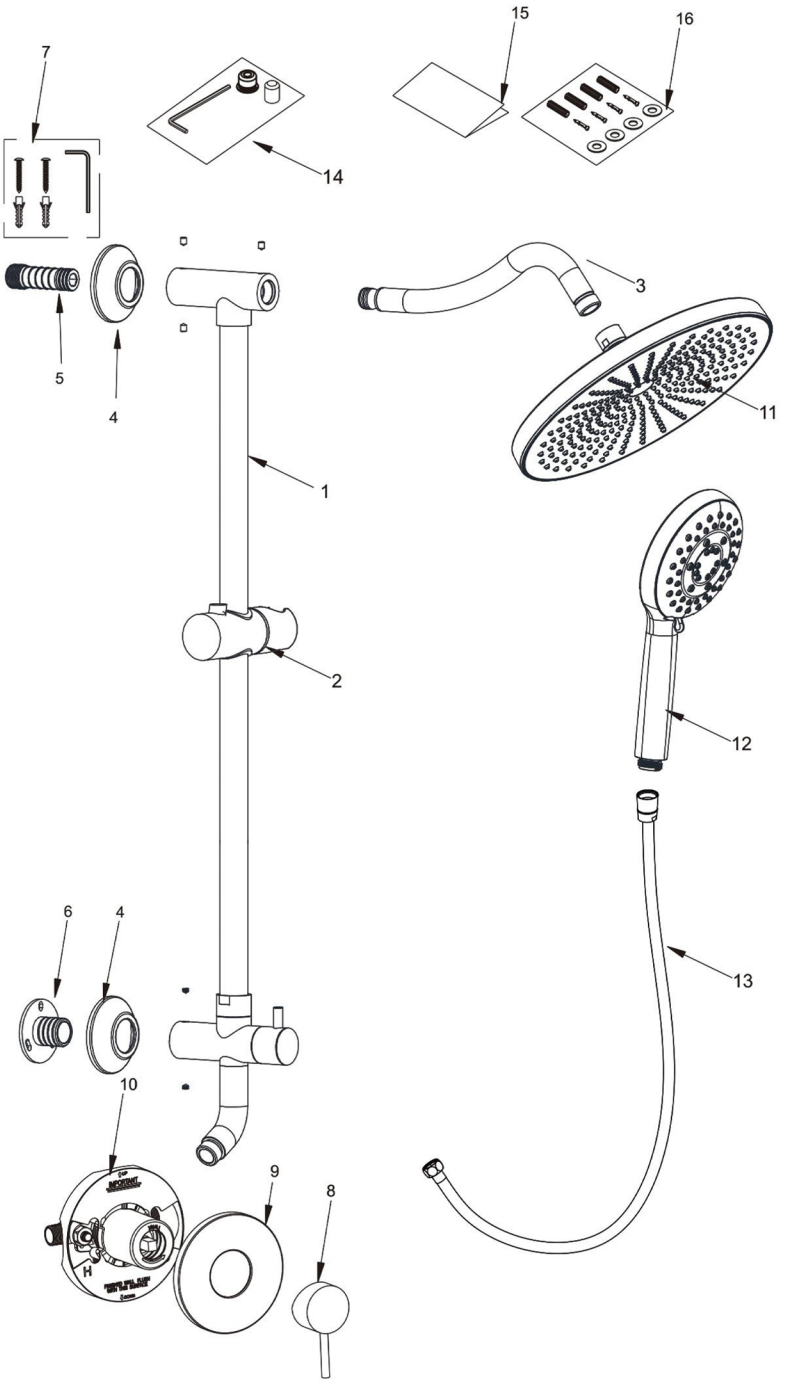


component								
No.	1	2	3	4	5	6	7	8
Name	water knockout drum	slider	Top shower tube	Curved foot cover	Water inlet joint	Holder	Screw packet	Embedded box
Qty	1	1	1	2	1	1	1	1
No.	9	10	11	12	13	14	15	16
Name	Cover plate	Switch handle	Shower head	Hand shower	Shower hose	Handle accessory bag	Manual	Screw accessory bag
Qty	1	1	1	1	1	1	1	1


Ⅳ. Installation Size

Before installation, refer to the product installation dimension drawing to determine the installation position.And pre-bury water pipes in the wall; flush the pipes with scrubbing tools and install the faucet to remove mud Sand, copper shavings, etc.

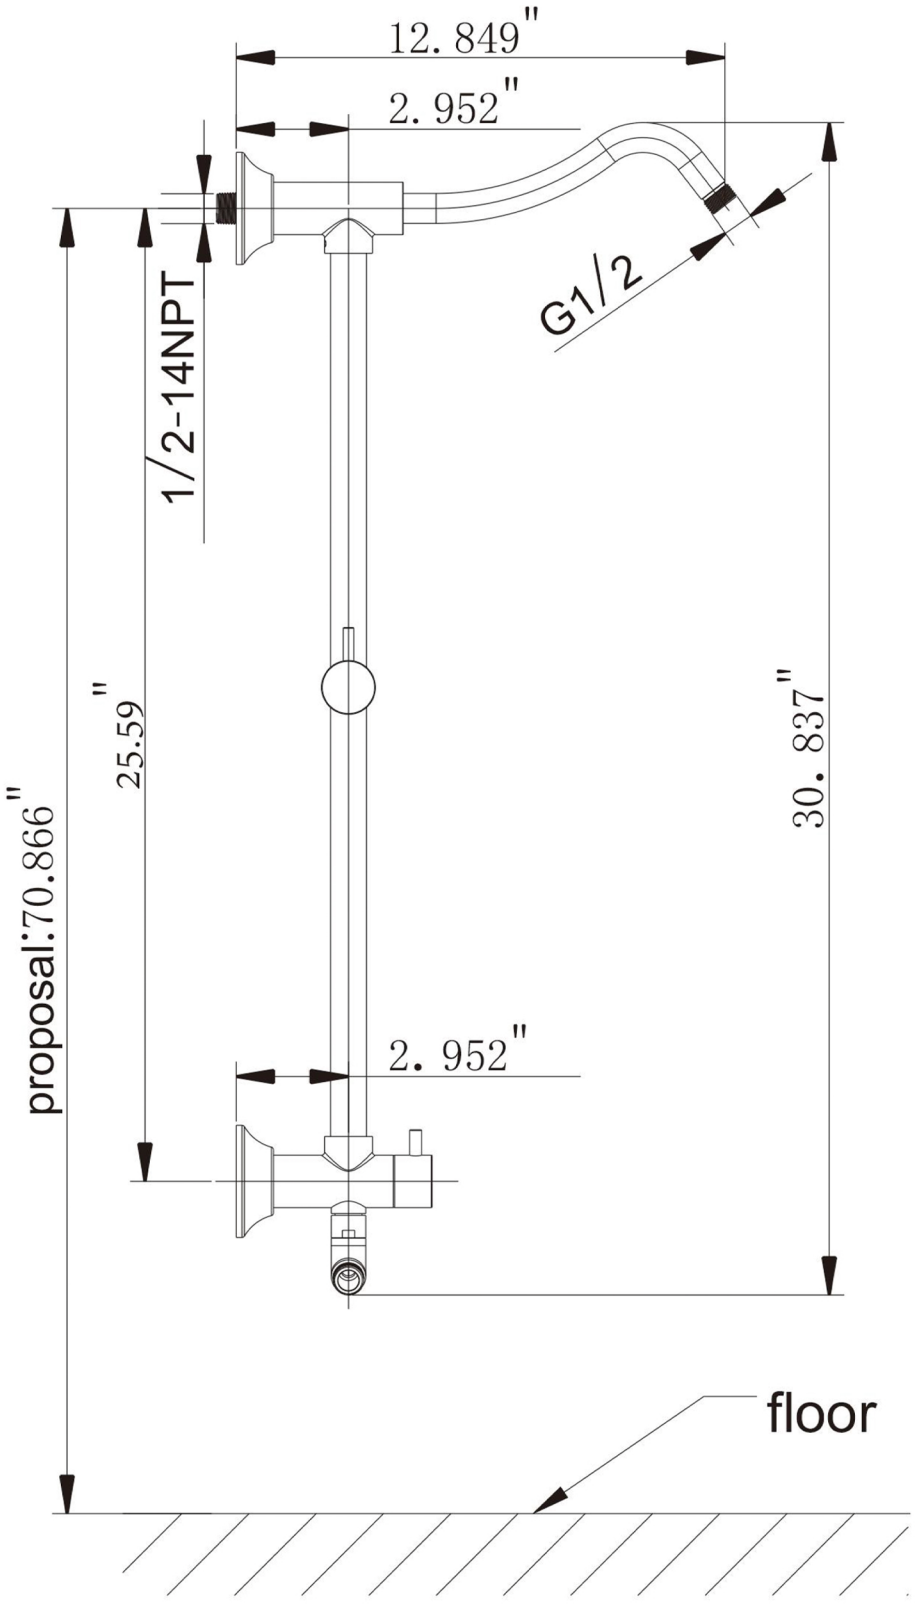

Ⅴ. Size of Main Embedded Box

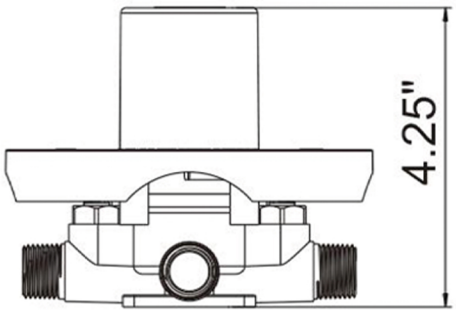

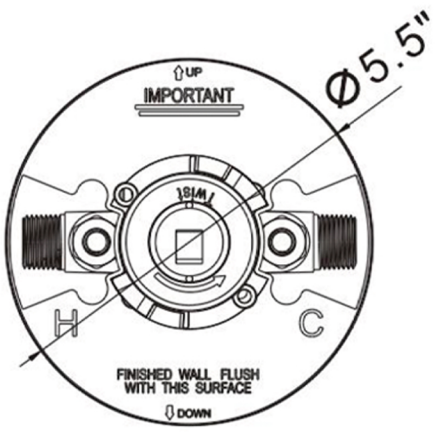


Ⅵ. Installation Method


1. Wrap water inlet joint with the raw material tape and connect it with the water pipe embedded in the wall .
2. A ttach the decorative cover to water inlet joint on the wall .
3. Measure the mounting position of the fixing seat according to the actual size of the product. After making the mark, drill a hole on the wall and punch the self-tapping rubber particles into the hole, then use the self-tapping screw to fix the fixing seat on the wall, and then set it firmly On the decorative cover.
4. Insert the water knockout drum into the top shower pipe, adjust the position and tighten it with a hexagonal wrench, and then connect it with the water inlet connector, tighten it with a hexagonal wrench, then insert the fixing seat on water knockout rum to the fixing seat on the wall, adjust the position and tighten it with a pole into the fixing seat on the wall, adjust the position and tighten it with a hexagonal wrench , If the position is slightly misaligned when the product is installed, the eccentric joint and fixing seat can be adjusted appropriately.

INSTALLATION METHOD

BEFORE YOU BEGIN

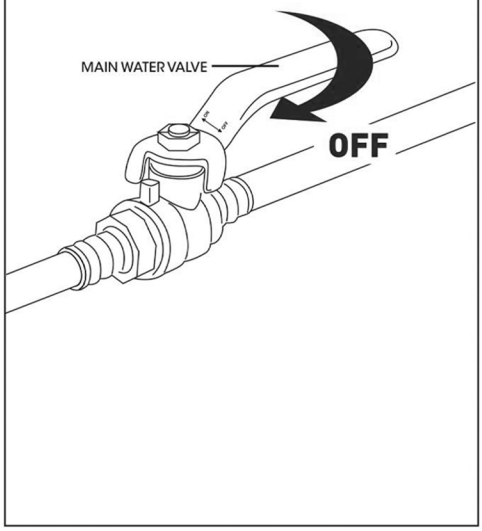


1

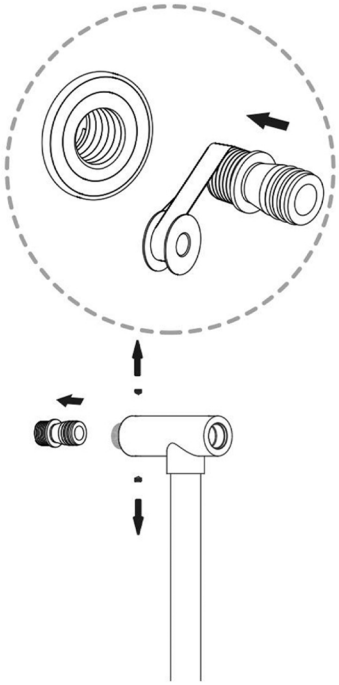


2


Screws fix or Glue tape Installation
(Both are included in the box)

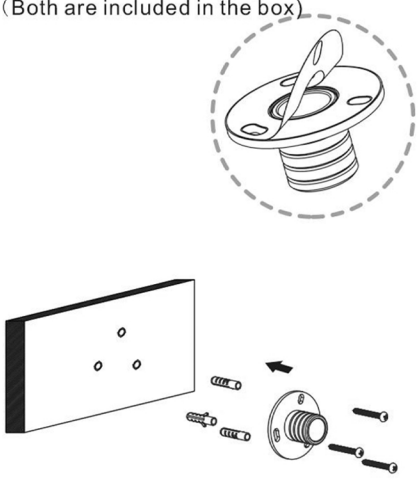


3

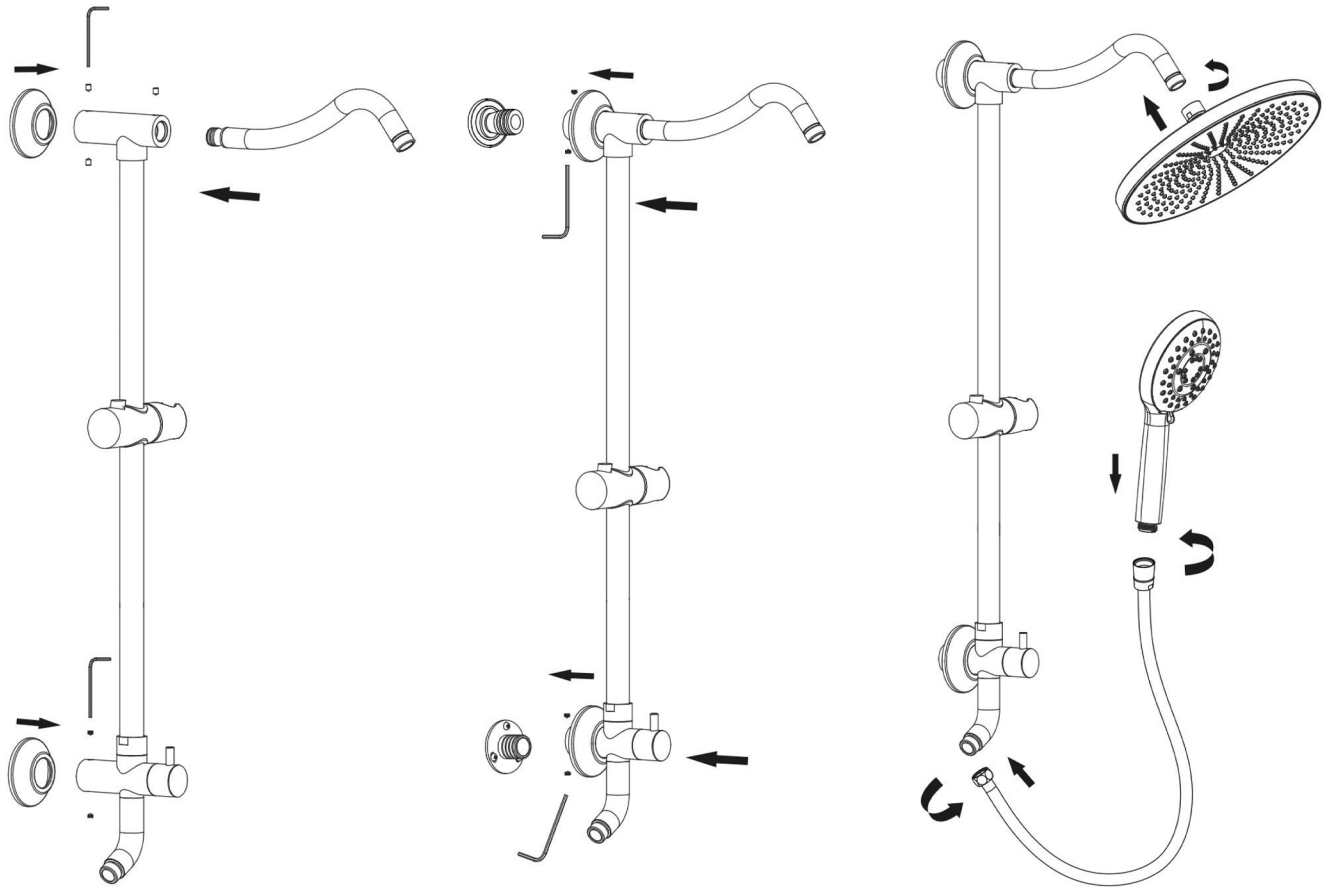


INSTALLATION STEPS OF VALVEBODY

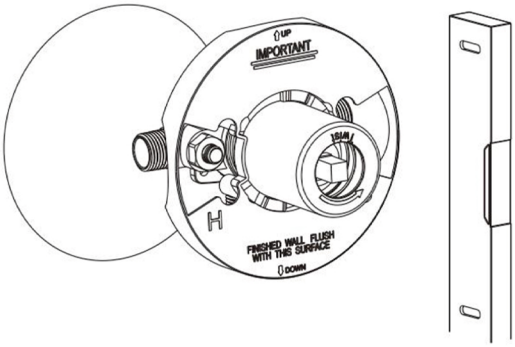


1).Lay wall tiles or other decorative wall,keep the wall level and 90° perpendicular to the embedded box, make the embedded box in the middle of a single tile as far as possible,keep the bottom of the hole flat, adjust the vertical and horizontal of the embedded box, fix the embedded box with screws, and tighten the joint with a hexagonal wrench, and test the water without leakage;

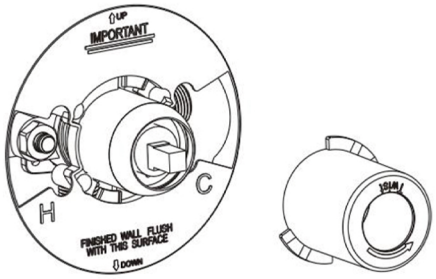

2).Remove the embedded box protection cover;

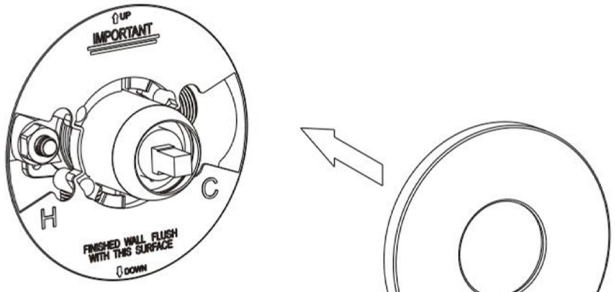


3).Install the control valve plate,check whether the protective rubber sleeve at the plate hole is off before installation, if there is no protective rubber sleeve, directly install the plate that is easy to scratch;

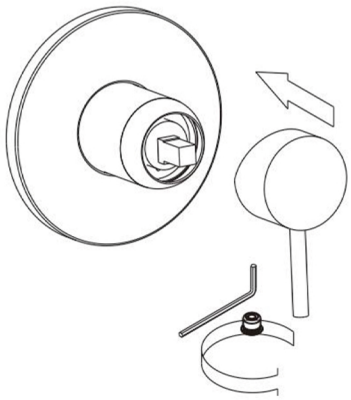


4).Install the switch handle,use a small hexagon wrench clockwise to fix the switch handle on the main valve core of the contral valve,and install the decorative cap;

Ⅷ.Installation Precautions

1.Please check the accessories listed in the " Standard Part List" after opening the product package. Check whether the parts are complete, and if there are any defects, please contact the seller immediately.
2.Any purchased replacement part must match with the basic installation size of this product.
3.The main part of the shower system has been inspected and debugged by the factory, please do not disassemble and assemble by yourself to avoid negative effects on performance.
4.Special attention must be paid to the cold and hot water pipes of the body assembly, the left for hot water while the right for cold water. If the connection is wrong, it will be opposite to the "H"and"C" indicator on the handle.
5.Before installing the faucet, be sure to remove the impurities and sludge in the embedded water pipe to avoid any blockage and bad effects on the water outlet function.





Ⅸ. Test method

1.Turn the faucet handle to the closed position, open the water inlet valve, and check whether there is any leakage at all water inlet ports.
2.Open the faucet handle to the maximum, and open the water inlet valve to check whether there is leakage at the water outlet and the sprinkler connection port.
3.Operate the reversing valve several times to check the shower water condition and whether there is any leakage outside the connection.
4.If the water pressure is lower than 0.05M Pa (it is possible that the faucet drips while the shower sprinkles water, or the faucet reversing valve does not work), a booster pump should be installed in the pipeline.

Care and maintenance

1. To keep the faucet bright and clean, please clean the faucet frequently or regularly. 2. Rinse only with clean water, and dry the faucet with a soft cotton cloth.

3. Do not use detergents containing coarse particles such as decontamination powder or polishing powder, nylon brushes, emery cloth or sandpaper to avoid abrasion of the product.

4. Do not use any acidic cleaning agent, or rough cleaning agent or soap to polish.

5. When the water flow of the faucet is significantly reduced, please clean the filter screen of the shower head and the rubber particle hole of the shower water to avoid affecting the shower water or blocking and bursting. Example: The flow of water out of the shower area is obviously reduced or some rubber particles do not come out. Please scrub the shower rubber particles with your hands or use a sewing needle (toothpicks) to pass through the shower rubber particle holes.

6. If a lot of cleaning work is required, please follow the following procedures:

a. Use clean water or a soft cloth to remove the dirt and scale film on the surface as much as possible;

b. Use any of the following cleaning agents to remove surface dirt and scale film: ☐ Mild liquid detergent.


☐Colorless glass cleaner, non-abrasive and completely dissoluble powdered cleaner (and mix according to the manufacturing instructions)

☐ Polishing fluid that is not suitable for abrasion;

☐Stubborn dirt can be bubbled with hot vinegar, then scrubbed with wax or toothpaste or with Amway special hardware cleaner.

☐ To remove stubborn water stains, you can use a fresh lemon slice to wipe the water stains several times, or orange peel with sufficient water can also play a strong role in water stains. There is no need to rub the orange belt color side vigorously, the stubborn stains on the faucet can be used.

c. After cleaning, please use clean water to remove all the cleaning agent and dry it with a soft cotton cloth.

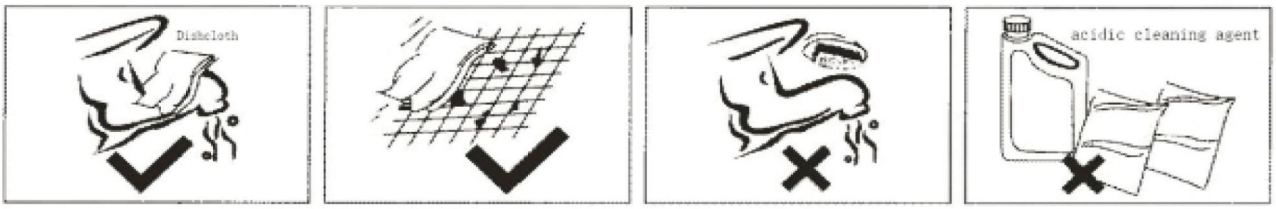

Please Do Not Return the Product to the Store.
Contact us with any questions.